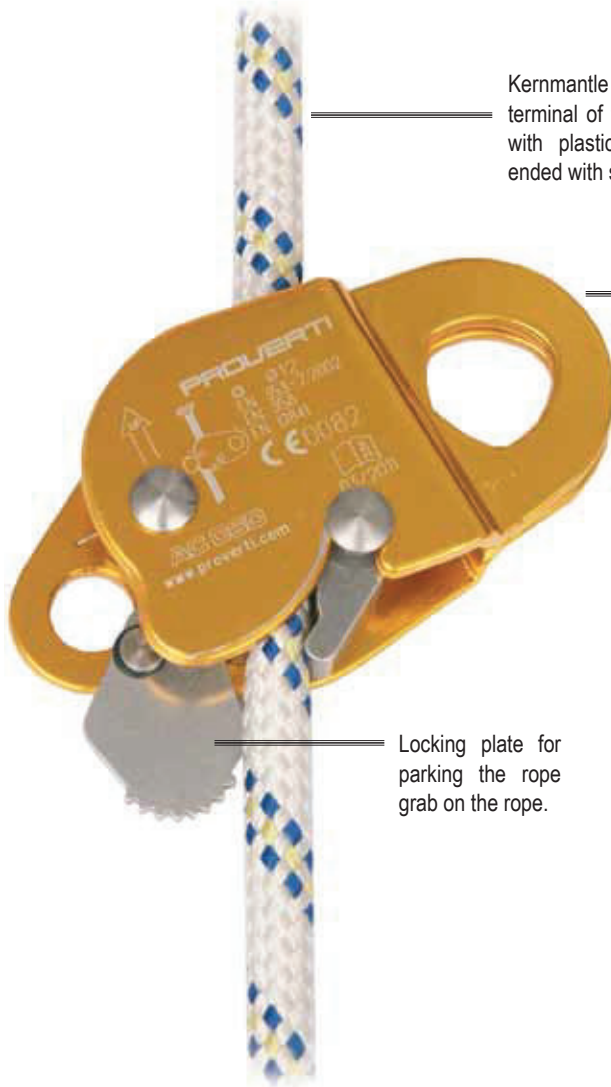**G-Force**
Safety @ Height Products

Guided type fall arrester AC 080

Ref. AC 080
EN 353-2, EN 358, EN 12841

• Guided type fall arrester on a flexible anchorage line
• Detachable aluminium rope grab
• For use on 12 mm rope
• Can be used as a fall arrester or a work positioning or an access rope
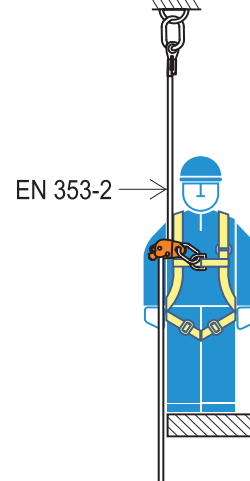• Available in 3 colours

Kernmantle 12 mm rope. Top terminal of the rope equipped with plastic thimble, bottom ended with security knot.

Aluminium, detachable rope grab with parking option.

Locking plate for parking the rope grab on the rope.

FALL ARRESTER

EN 353-2

WORK POSITIONING

EN 358

ACCESS ROPE

EN 12841

Attach the line from the side of the loop with a thimble to the point of solid structure using an approved connector

EN 795
EN 362

Open the front side

free end of the line with a knot security

insert the line into the mechanism

An arrow on the side of the device should be facing upwards towards the line's anchor point

Close the front side

Connect the sides, then attach the device to the attachment point "A" of the harness using an approved Class B connector

EN 362/B

"A" - EN 361

to lock the mechanism on the lanyard, move the locking plate towards the lanyard (Fig. 2)

① ②